NOTE(S)

1. BOARD SIZES NOT TO SCALE
2. ENSURE PINS ARE ORIENTATED CORRECTLY. MAKE SURE THE WIRE PLUGGED INTO THE PIN MARKED “12V” IS THE SAME FOR BOTH BOARDS. IT IS POSSIBLE TO PLUG THIS CABLE IN BACKWARDS AND DAMAGE EITHER CIRCUIT BOARD.

RIDDLEDTV.COM

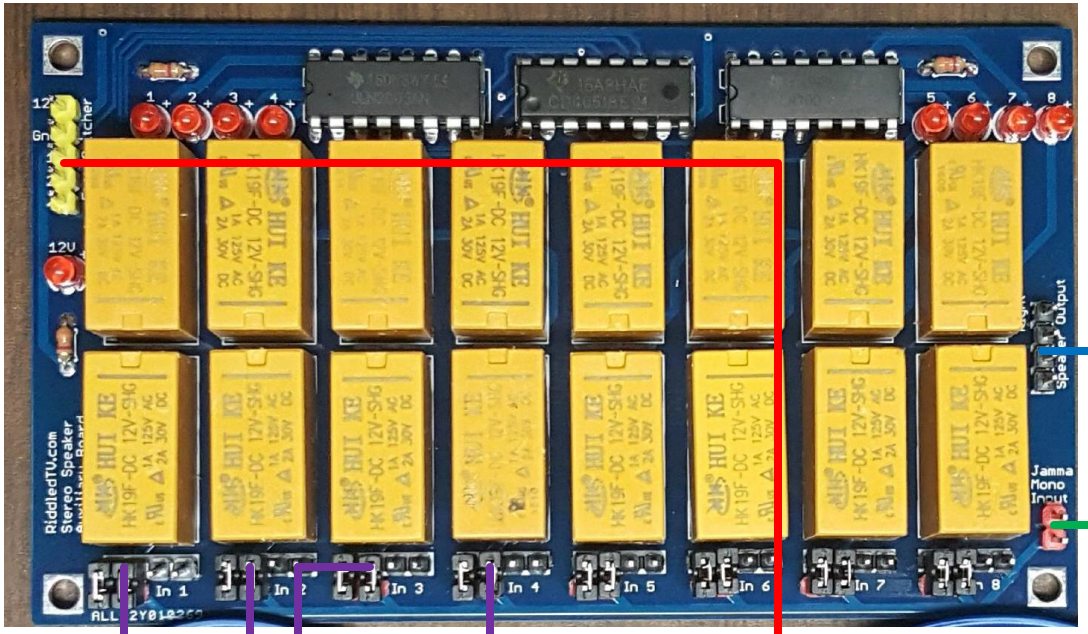

TO SPEAKERS

2 PIN SPEAKER CABLE FROM JAMMA HARNESS

STEREO AUXILIARY BOARD

5 PIN CABLE, INCLUDED WITH STEREO AUX BOARD. CAUTION: SEE NOTE 2

GAME PCB 1

GAME PCB 2

GAME PCB 3

GAME PCB 4

GAME PCB 5

GAME PCB 6

GAME PCB 7

GAME PCB 8

TO STEREO AUX BOARD INPUTS 5 THROUGH 8

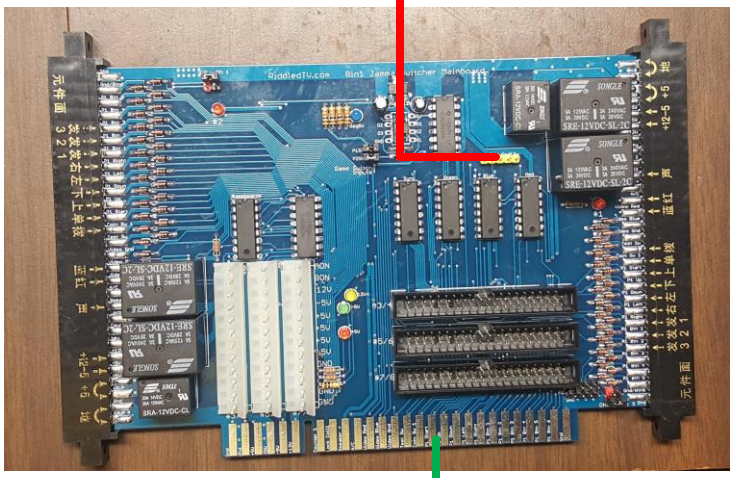

SWITCHER MAINBOARD

Rev	Date	Description

Designed:	Jim Riddle
Drawn:	Jim Riddle
Date:	Sept 5, 2017

DRAWING TITLE

8 WAY JAMMA SWITCHER - STEREO AUXILIARY BOARD

DRAWING NUMBER

ST-AUX-1

RIDDLEDTV.COM

STEREO
AUXILIARY BOARD

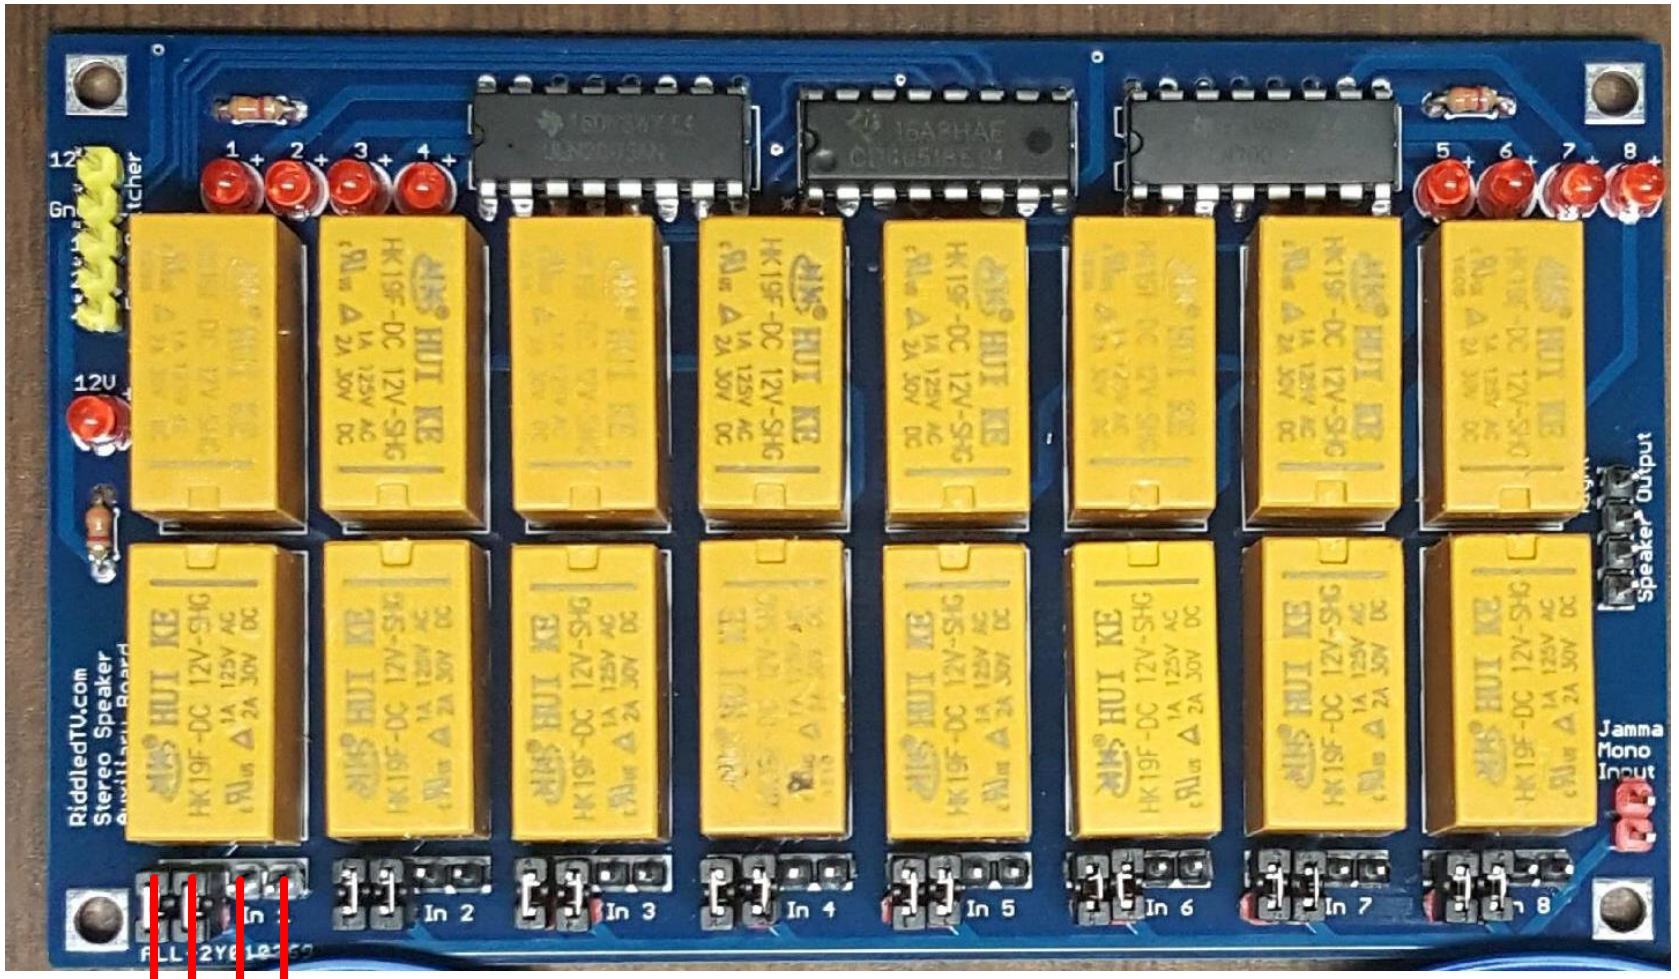

RIGHT (+)
RIGHT (-)
LEFT (-)
LEFT (+)

SPEAKER OUTPUTS FROM GAMEBOARD 1
(SIMILAR FOR BOARDS 2-8)
SEE NOTE 1

OUTPUT PINS:
RIGHT (+)
RIGHT (-)
LEFT (-)
LEFT (+)

NOTE(S)
1. REMOVE JUMPERS IF STEREO INPUTS ARE USED. PLACE JUMPERS AS SHOWN TO USE MONO SOUND FROM JAMMA HARNESS
2. ALL CONNECTORS USE 0.100 INCH (2.54mm) SPACING.

Rev	Date	Description

Designed:	Jim Riddle
Drawn:	Jim Riddle
Date:	Sept 5, 2017

DRAWING TITLE
STEREO AUXILIARY BOARD - SPEAKER INPUTS

DRAWING NUMBER
ST-AUX-2